

6.6 Do-Not-Disturb

User may enable Do-Not-Disturb (DND) feature on the device to reject incoming calls (including call waiting). The DND can be enabled on line basis.

To quickly enable or disable the DND on both lines,

When the device is in the default standby mode,













- Press soft-button  [More] till you find the  [Do-Not-Disturb] button.
- Press  [Do-Not-Disturb] button to enable DND on both line and icon  will be displayed on the screen.
- Press  [Do-Not-Disturb] button again to disable DND on both line and icon  will be disappeared.



Figure 63 - DND Enabled on Both Lines

If user wishes to enable or disable DND on a specific line, user could change the DND configuration in line configurations.

- Long-pressed  or  line key to open the line configuration screen.
- NOTICE! If user has set PIN code, user must enter correct PIN code first before editing line configurations.**
- Press up navigator key twice, the DND setting is the second last setting in line configuration.
 - Press  [Select] button to enable or disable DND. When done, press  [OK] button to save the changes.
 - User will see icon  'DND on Line1' or  'DND on Line2' against the enabled line.

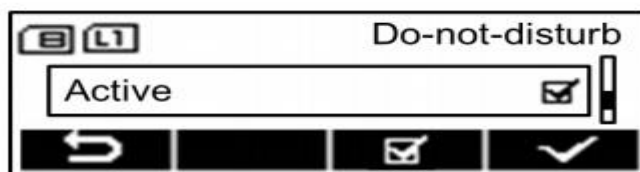


Figure 64 - Configure DND on Line1



Figure 65 - DND Enabled on Line2